
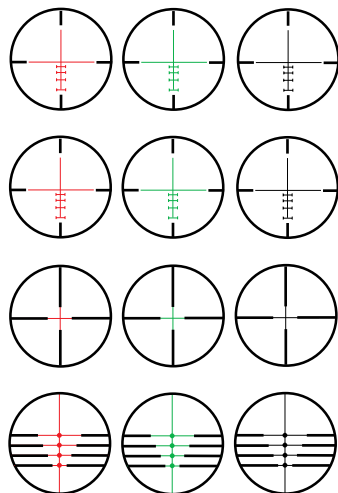


## RED-DOT SPECIFICATIONS

Series/Model	Length (inches)	Weight (oz.)	Power/ Objective Lenses (mm)	Field of View (feet @100yds.)	Eye Relief (inches)	Parallax Setting (in yards)	Click Value (inches @100yds.)	Range of Adjustment (inches @100yds.)	Reticle Color	Reticle Type	Battery
<b>CROSSBOW</b>											
TG8025B3/C3	3.82	6.0	1x25	52	Unlimited	>25	1	40	Red	3 Dot, 5 MOA	CR2032
TG8030B3/C3	3.82	7.9	1x30	68	Unlimited	>25	1	40	Red	3 Dot, 5 MOA	CR2032
TG8350B4	3.30	4.1	1x34	74	Unlimited	>30	1	30	Red/Green	5MOA Dot	CR2032
TG8350C4	3.30	4.1	1x34	74	Unlimited	>30	1	30	Red/green	5MOA Dot	CR2032
<b>DUAL COLOR/MULTI-RETICLE</b>											
TG8025MB	4.92	6.5	1x25	56	Unlimited	>25	1	40	Red/Green	4 Reticle Patterns	CR2032
TG8030MB/MC	4.20	8.0	1x30	68	Unlimited	>25	1	40	Red/Green	4 Reticle Patterns	CR2032
TG8030MB2/C2	5.80	10.2	2x42	40	Unlimited	>60	0.5	40	Red/Green	4 Reticle Patterns	CR2032
TG8360B	3.30	4.1	1x34	74	Unlimited	>30	1	30	Red/Green	4 Reticle Patterns	CR2032
TG8360C	3.30	4.1	1x34	74	Unlimited	>30	1	30	Red/Green	4 Reticle Patterns	CR2032
<b>DUAL COLOR</b>											
TG8030DB/C	3.82	7.9	1x30	68	Unlimited	>25	1	40	Red/Green	5 MOA Dot	CR2032
TG8030DB2/C2	5.40	9.2	2x42	40	Unlimited	>60	0.5	30	Red/Green	2.5 MOA Dot	CR2032
TG8030DBR/DCR	3.82	9.0	1x30	68	Unlimited	>25	1	40	Red/Green	5 MOA Dot	CR2032
TG8040DB/C	3.82	9.5	1x40	80	Unlimited	>25	1	40	Red/Green	5 MOA Dot	CR2032
<b>TRADITIONAL</b>											
TG8025B	4.30	6.0	1x25	52	Unlimited	>25	1	40	Red	5 MOA Dot	CR2032
TG8030B/A/H	3.82	7.9	1x30	68	Unlimited	>25	1	40	Red	5 MOA Dot	CR2032
TG8040B	3.82	9.5	1x40	80	Unlimited	>25	1	40	Red	5 MOA Dot	CR2032
TG8030B2/A2/C2	5.40	9.2	2x42	40	Unlimited	>60	0.5	30	Red	2.5 MOA Dot	CR2032
TG8045B	3.82	9.8	1x45	88	Unlimited	>25	1	40	Red	5 MOA Dot	CR2032
<b>TRU-POINT™ (tubeless)</b>											
TG8300B	2.00	1.7	1x26	42	Unlimited	>50	Dial	50	Red	4 MOA Dot	CR2032

## SCOPE SPECIFICATIONS

Series/Model	Dimensions (inches)							Weight (oz.)	Mag. (x)	Obj. Dia. (mm)	Field of View		Eye Relief		Parallax Setting (yards)	Click Value (inches @100yards)	Range of Adjustment (inches all directions from center @100yds.)	Reticle Type	Battery
	A	B	C	D	E	F	G				High Power (feet @100 yards)	Low Power (feet @100 yards)	High Power (inches @0.75D)	Low Power (inches @0.75D)					
<b>TRU-BRITE™ XTREME</b>																			
TG8539BX	11.22	4.53	1.66	1.62	1.78	2.03	1.00	15.5	3-9	44	13.8	40.3	4.75	5.50	100	0.25	30.0	2 Color IR Duplex	CR2032
TG8539BXB	11.22	4.53	1.66	1.62	1.78	2.03	1.00	15.5	3-9	44	13.8	40.3	4.75	5.50	100	0.25	30.0	2 Color IR BDC (Centerfire)	CR2032
TG8531BXB	12.41	4.85	1.97	1.62	1.78	2.03	1.00	17.6	3-12	44	10.3	39.6	4.50	5.00	100	0.25	30.0	2 Color IR BDC (Centerfire)	CR2032
TG8541BXB	13.78	4.85	1.97	1.62	1.78	2.52	1.00	18.9	4-16	50	7.5	30.0	4.50	5.00	15-∞	0.25	25.0	2 Color IR BDC (Centerfire)	CR2032
<b>TRU-BRITE™ CENTERFIRE BDC</b>																			
TG8539BLB	12.80	4.90	1.70	1.70	1.70	2.00	1.00	20.7	3-9	44	14.0	42.0	3.40	3.75	100	0.25	30.0	2 Color IR BDC (Centerfire)	CR2032
TG8531BLB	13.90	6.10	2.60	2.10	1.70	2.00	1.00	19.9	3-12	44	8.4	33.2	3.50	3.90	100	0.25	30.0	2 Color IR BDC (Centerfire)	CR2032
TG8541BLB	14.40	6.30	2.20	2.70	1.70	2.20	1.00	22.9	4-16	50	6.8	27.0	3.50	3.90	100	0.25	30.0	2 Color IR BDC (Centerfire)	CR2032
<b>TRU-BRITE™ MUZZLELOADER BDC</b>																			
TG8531BLM/CLM	13.90	6.10	2.60	2.10	1.70	2.00	1.00	19.9	3-12	44	8.4	33.2	3.50	3.90	100	0.25	30.0	2 Color IR BDC (Muzzleloader)	CR2032
<b>MAXUS™ XLE</b>																			
TG8516BHX	12.00	5.00	1.70	2.10	1.80	2.00	1.00	15.6	1.5-6	44	15.0	57.8	4.75	5.50	100	0.25	30.0	Duplex	
TG8531BHX	13.40	4.90	1.70	2.10	1.80	2.00	1.00	17.1	3.5-10	50	11.0	32.0	4.75	5.50	100	0.25	30.0	Duplex	
TG8539BHX	12.70	5.40	1.90	2.30	1.80	2.20	1.00	15.8	3-9	44	12.0	35.2	4.75	5.50	100	0.25	30.0	Duplex	
TG8531BHB	13.40	5.40	1.90	2.30	1.80	2.20	1.00	17.6	3.5-10	50	11.0	32.0	4.75	5.50	100	0.25	30.0	BDC (Centerfire)	
<b>INFINITY™</b>																			
TG8541BT	15.00	5.25	1.75	2.00	1.75	2.13	1.00	20.1	4-16	44	5.0	20.0	2.75	3.25	15-∞	0.125	20.0	Fine Crosshair	
TG8562BT	16.13	6.75	3.50	2.13	1.75	2.13	1.00	21.0	6-24	44	4.0	15.0	2.75	3.25	15-∞	0.125	20.0	Fine Crosshair	
<b>CROSSBOW</b>																			
TG8515BLC	10.70	3.90	1.20	1.30	1.70	1.60	1.00	17.6	1.5-5	32	21.0	61.0	3.40	4.50	30	0.25	30.0	2 Color IR Trajectory/Ranging	CR2032
TG8504B3/C3	8.00	3.30	0.90	1.10	1.50	1.50	1.00	11.4	4	32	n/a	24.0	n/a	4.00	30	0.25	40.0	Trajectory/Ranging	
<b>COMPACT 4x32</b>																			
TG8504BR	8.00	3.30	0.90	1.10	1.50	1.50	1.00	11.4	4	32	n/a	24.0	n/a	4.00	50	0.25	40.0	Duplex	
TG8504BD/CD	8.00	3.30	0.90	1.10	1.50	1.50	1.00	11.4	4	32	n/a	24.0	n/a	4.00	100	0.25	40.0	Diamond Ballistic	

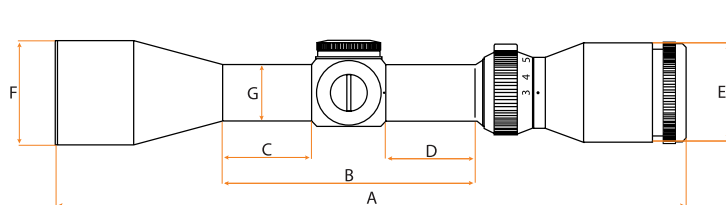

### Red/Green/Black BDC (Centerfire)

Two-color illuminated, bullet drop compensating reticle. Can be easily calibrated to many centerfire loads and provides aiming points from 100 to 600 yards.

### Red/Green/Black BDC (Muzzleloader)


Two-color illuminated, bullet drop compensating reticle. Can be easily calibrated to many bullet/powder combinations and provides aiming points out to 300 yards.

### Red/Green/Black Duplex

Two-color illuminated duplex reticle provides fast target acquisition in any lighting condition.


### Red/Green/Black Crossbow

Two color illuminated, arrow drop compensating and ranging reticle. Specially designed for the TRU-BRITE™ 1.5-5x32. Can be calibrated for speeds from 225 to 400+ fps and provides aiming points in any lighting conditions from 20 to 50 yards.




### Duplex

Classic combination of heavy post and fine crosshair provides fast target acquisition and accurate shot placement.



### Fine Crosshair

Designed for ultra-precise shot placement at high magnification.




### Shotgun

Specially designed combination of duplex and circle. Circle diameter can be adjusted to indicate maximum pattern density at various distances or to determine the distance to the target.




### Diamond Ballistic

Specially designed for the compact and light weight 4x32. Provides the deer or turkey hunter with a diamond reference that measures 5 inches at 40 yards.



### BDC (Centerfire)

Specially designed bullet drop compensating reticle. Can be easily calibrated to many centerfire loads and provides aiming points from 100 to 600 yards.



### Crossbow

Specially designed for modern hunting crossbows. Provides aiming points from 20 to 50 yards and can be used to easily determine the distance to the target.